

FHC9-50-500-1-S

0.05~0.5GHz, 1W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.05~0.5GHz
Insertion Loss:	0.6dB max. (AVG)
VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±10° max.
Impedance:	50Ω
Average Power:	1W CW

Mechanical

Size ^{*1} :	40*30*12.7mm 1.575*1.181*0.5in
Connectors:	SMA female
Mounting:	2-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental


Temperature:	-55~+125°C
--------------	------------

How To Order

FHC9-50-500-1-S

Customization is available upon request.

Outline Drawings

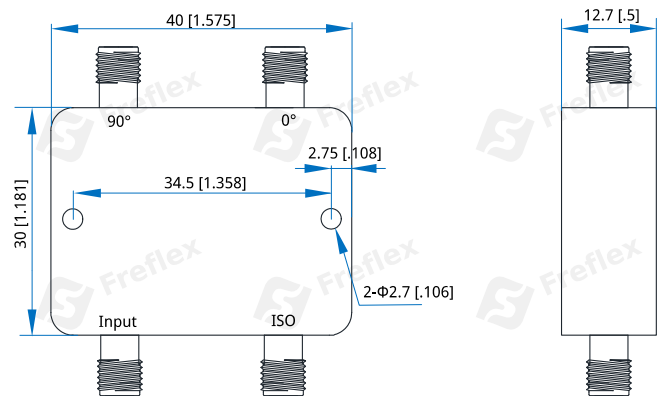

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]