

FHC9-6000-40000-20-K

6~40GHz, 20W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	6~40GHz
Insertion Loss:	2dB max.
VSWR:	1.8 max.
Isolation:	14dB min.
Amplitude Balance:	± 1.2 dB max.
Phase Balance:	$\pm 10^\circ$ max.
Average Power:	20W max.
Impedance:	50 Ω

Mechanical


Size ^{*1} :	43.7*21.9*12.7mm 1.72*0.862*0.5in
Connectors:	2.92mm Female
Mounting:	2- $\Phi 2.6$ mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

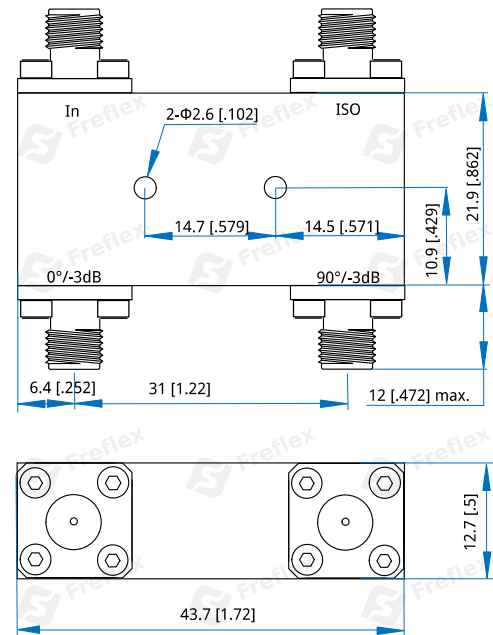

Unit: mm [in]

Tolerance: .x $\pm$ 0.5mm [$\pm$ 0.02in], .xx $\pm$ 0.1mm [$\pm$ 0.004in]

How To Order

FHC9-6000-40000-20-K

Customization is available upon request.