

FHC9-8000-12000-30-S

8~12GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	8~12GHz
Insertion Loss:	1.2dB max.
VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	±1dB max.
Phase Balance:	90±7°
Average Power:	30W
Impedance:	50Ω

Mechanical


Size ^{*1} :	60*25*11mm 2.362*0.984*0.433in
RF Connectors:	SMA Female
Mounting:	4-Φ2.3mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

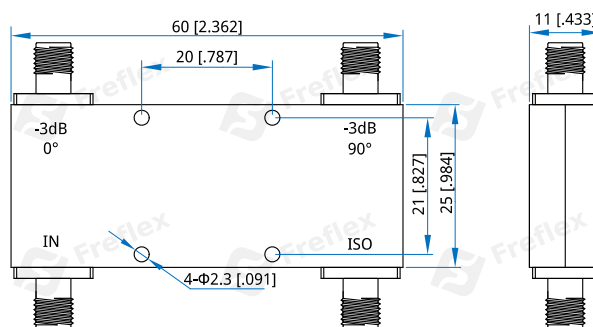

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FHC9-8000-12000-30-S

Customization is available upon request.