

FCN-FL4G-M304-01

N Connector, DC~18GHz

Features: * Low VSWR

Applications: * Wireless

* Radar

* Instruments

* Electronics

Electrical

Frequency: DC~18GHz VSWR: 1.2 max. Impedance: 50Ω


Mechanical

RF Connector: N Female **Outer Conductor:** stainless steel

> Dielectric: PTFE

Gold plated beryllium copper Inner Conductor:

Outline Drawings

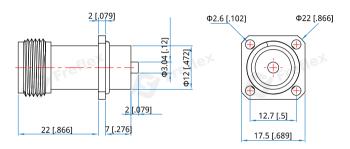

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCN-FL4G-M304-01

Customization is available upon request.

Rev 1.1 Freflex Inc. sales@freflex.com www.freflex.com