

FCPF-MB-B70-02

SMP Connector, DC~18GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC
Impedance:	50Ω


Mechanical

RF Connector:	SMP male
Mating Life Cycle:	100 Cycles min.
Detent mode:	Full detent
Outer Conductor:	Gold plated Brass
Dielectric:	PTFE
Inner Conductor:	Gold plated Beryllium Copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

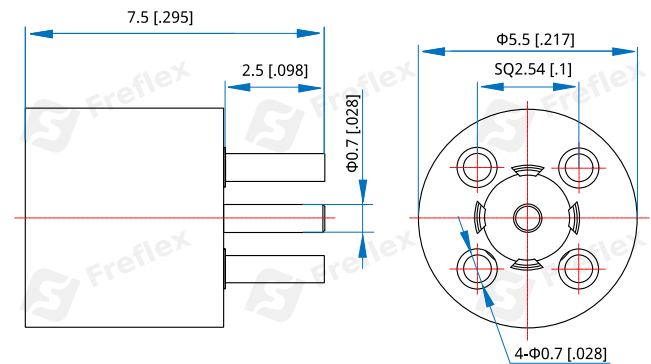

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FCPF-MB-B70-02

Customization is available upon request.