

FCPF-MO-M38-01

SMP Connector, DC~40GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~40GHz
VSWR:	1.10 max. @DC~10GHz 1.20 max. @10~26.5GHz 1.25 max. @26.5~40GHz
Impedance:	50Ω
Impedance of Dielectric:	1000MΩ (250V)
Voltage Withstand:	500V AC

Mechanical


RF Connector:	SMP male
Detent mode:	Full detent
Bead:	7070 glass sintering
Outer Conductor:	Gold plated keval 4J29
Inner Conductor:	Gold plated keval 4J29

How To Order

FCPF-MO-M38-01

Customization is available upon request.

Outline Drawings

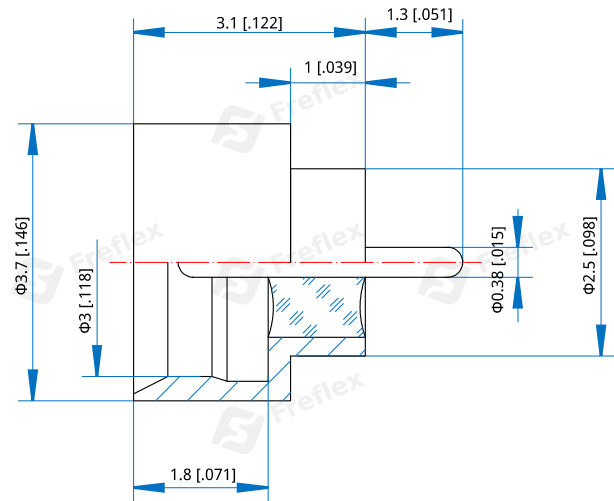

Unit: mm [in]

Tolerance: ±0.05mm [±0.002in]