

FCS-FRL4G-P100-01

SMA Connector, DC~26.5GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~26.5GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connector: SMA Female
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

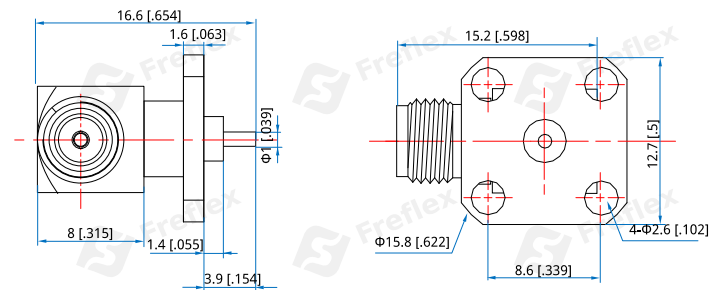

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCS-FRL4G-P100-01

Customization is available upon request.