

FCS1-ML4B-M150-01

SHV Connector, DC~0.4GHz

Features: * Low VSWR Applications: * Wireless

* Radar

* Instruments

* Electronics

Electrical


Frequency: DC \sim 0.4GHz Impedance: 50Ω

Mechanical

RF Connector: SHV Male

Outer Conductor: Nickel plated brass Inner Conductor: Gold plated brass

Outline Drawings

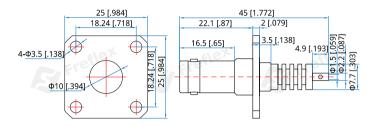

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCS1-ML4B-M150-01

Customization is available upon request.

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1