

FCT-FL4B-P127-02

TNC Connector, DC~8GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~8GHz
VSWR:	1.2 max.
Impedance:	50Ω
Dielectric Withstand Voltage	1000Vrms
Insulation Resistance	5000MΩ

Mechanical


RF Connector:	TNC Female
Outer Conductor:	Nickel plated brass
Inner Conductor:	Gold plated phosphor copper
Dielectric:	PTFE

How To Order

FCT-FL4B-P127-02

Customization is available upon request.

Outline Drawings

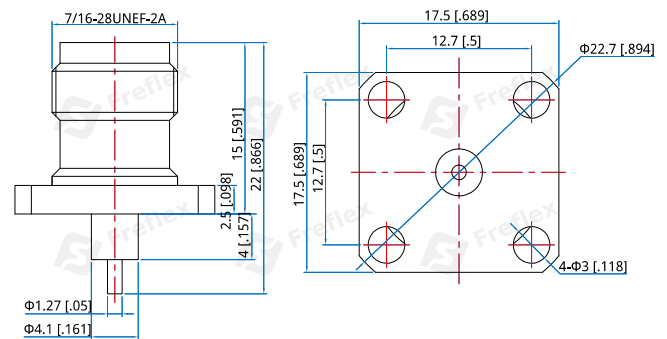

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]