

FCT-FL4B-P140-01

TNC Connector, DC~11GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~11GHz
Impedance:	50Ω
Dielectric Withstand Voltage	1000Vrms
Insulation Resistance	5000MΩ min.

Mechanical

RF Connector:	TNC Female
Outer Conductor:	Ternary plated brass
Inner Conductor:	Gold plated beryllium copper
Dielectric:	PTFE

Environmental


Operating Temperature:	-55~+165°C
------------------------	------------

How To Order

FCT-FL4B-P140-01

Customization is available upon request.

Outline Drawings

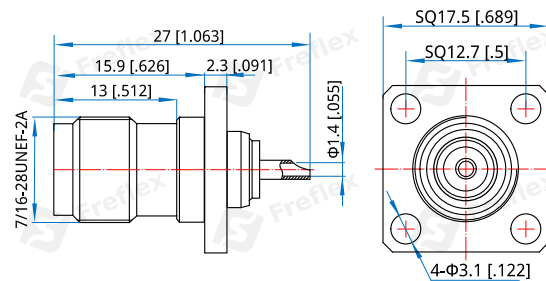

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]