

FBF-10100-10400-40

10.1~10.4GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	10.1~10.4GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.5 max.
Stopband Attenuation:	40dB@0.1~9.9GHz min. 40dB@10.6~20GHz min.
Power:	40W

Mechanical


Size ^{*1} :	59*13*10mm 2.323*0.512*0.394in
Connectors:	SMA Female (Removable)
Mounting:	4-M2 through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

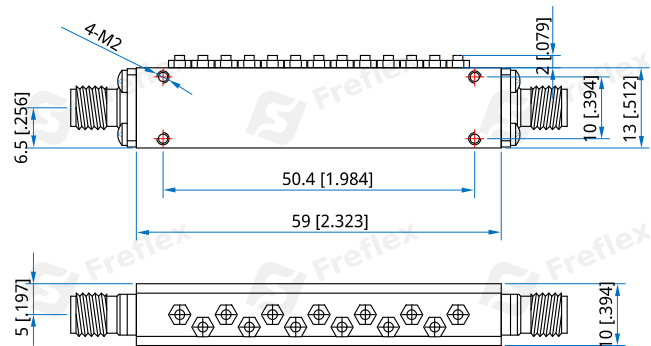

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-10100-10400-40

Customization is available upon request.