

# **FBF-10200-10800-30**

10.2~10.8GHz, 30dB

## **Features:**

- \* High Stopband Rejection
- \* Small Size

## **Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

## **Electrical**


Frequency:	10.2~10.8GHz
Passband Insertion Loss:	1.5dB max.
Stopband Attenuation:	30dB@10GHz min. 30dB@11GHz min.
VSWR:	1.5 max.

## **Mechanical**

Size <sup>*1</sup> :	80.73*17*19mm 3.178*0.669*0.748in
RF Connectors:	SMA Male, SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

## **Outline Drawings**

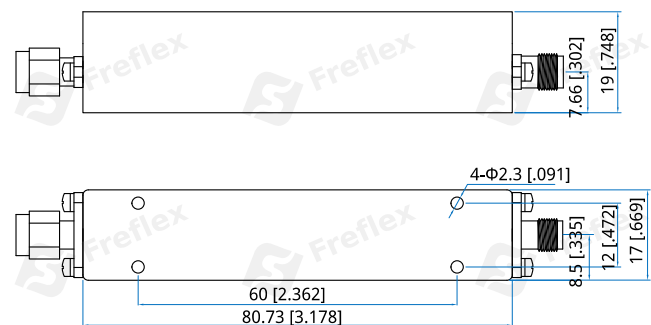

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

## **How To Order**

**FBF-10200-10800-30**

Customization is available upon request.