

FBF-1800-2200-45

1.8~2.2GHz, 45dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	1.8~2.2GHz
1dB Bandwidth:	400MHz min.
Passband Insertion Loss:	1.2dB max.
Stopband Attenuation:	45dBc@1550MHz min. 45dBc@2450MHz min.
VSWR:	1.5 max.
Average Power:	40W

Mechanical


Size ^{*1} :	68*27*13mm 2.677*1.063*0.512in
RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

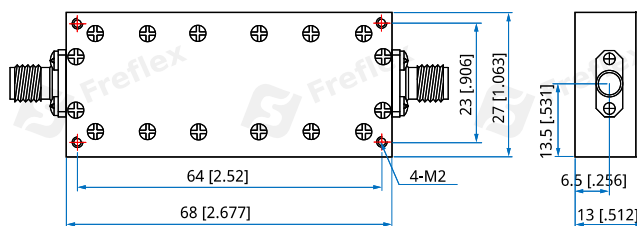

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-1800-2200-45

Customization is available upon request.