

FBF-18000-26500-30

18~26.5GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	18~26.5GHz
Passband Insertion Loss:	1.2dB max.
Passband Ripple:	0.8dB max.
VSWR:	1.3 max.
Stopband Attenuation:	80dB @DC ~ 16.2GHz, 27.7 ~ 35GHz min. 30dB @16.2 ~ 17.15GHz, 27 ~ 27.7GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	80*16*9.5mm 3.15*0.63*0.374in
Connectors:	2.92mm Female
Mounting:	4-M2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

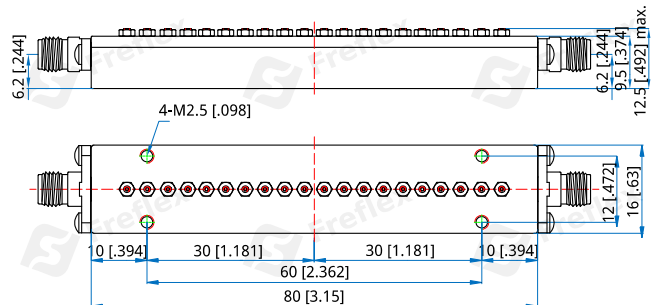

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-18000-26500-30

Customization is available upon request.