

FBF-1950-2050-60

1.95~2.05GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	1.95~2.05GHz
Insertion Loss:	3dB max.
Stopband Attenuation:	60dB@1.7~2.3GHz min.
VSWR:	1.5 max.

Mechanical


Size ^{*1} :	30*9*6.5mm 1.181*0.354*0.256in
Mounting:	2-Φ0.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+60°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

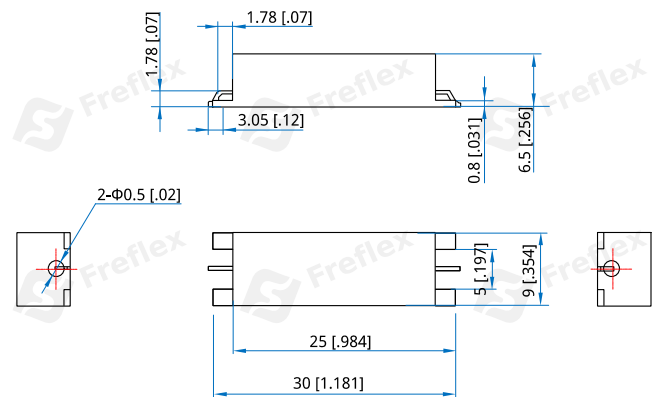

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-1950-2050-60

Customization is available upon request.