

FBF-20600-25000-60

20.6~25GHz, 60dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	20.6~25GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.8 max.
Stopband Attenuation:	60dBc@18.8GHz min. 60dBc@26.8GHz min.

Mechanical


Size ^{*1} :	48.3*16*7mm 1.902*0.63*0.276in
RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

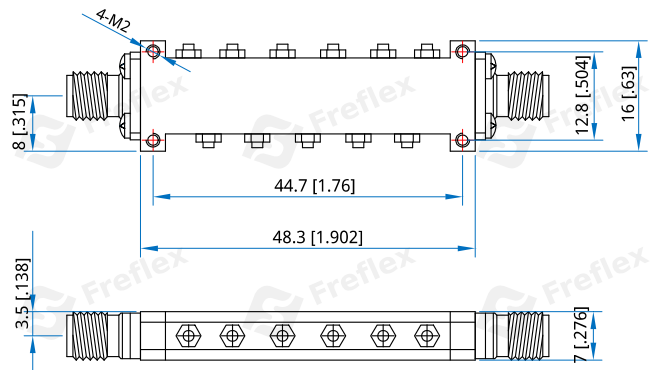

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-20600-25000-60

Customization is available upon request.