

FBF-2200-2300-60

2.2~2.3GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.2~2.3GHz
Center Frequency:	2.25GHz
Insertion Loss:	3dB max. @2.25GHz
Pass Band Return Loss:	18dB min.
Stopband Attenuation:	60dB min. @2.16GHz
	60dB min. @2.34GHz
Power:	5W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	130*30*18mm
	5.118*1.181*0.709in
Connectors:	SMA female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-10~+60°C
------------------------	-----------

Outline Drawings

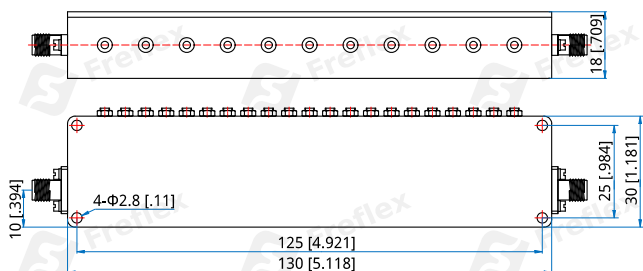

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FBF-2200-2300-60

Customization is available upon request.