

FBF-2200-2400-30-N

2.2~2.4GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.2~2.4GHz
Passband Width:	200MHz
Center Insertion Loss:	2.2dB max.
-1.5dB Bandwidth:	200MHz min.
Stopband Attenuation:	40dB@DC~2.1GHz
	30dB@2.5~4.5GHz min.
VSWR:	1.5 max.

Mechanical


Size ^{*1} :	63.5*25.4*25.4mm
	2.5*1*1in
RF Connectors:	N female
Mounting:	4-M2.5, depth 8mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

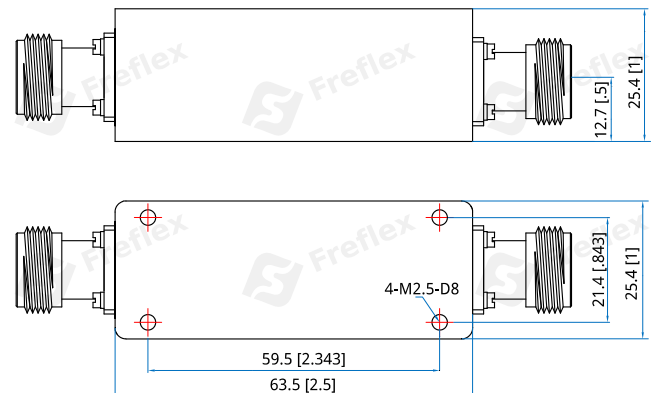

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-2200-2400-30-N

Customization is available upon request.