

FBF-2200-2400-60

2.2~2.4GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	2.2~2.4GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
Stopband Attenuation:	60dB@DC~2.1GHz min. 60dB@2.5~6GHz min.
VSWR:	1.22 max.
Impedance:	50Ω
Average Power:	20W max.

Mechanical


Size ^{*1} :	130*23*27mm 5.118*0.906*1.063in
RF Connectors:	SMA female
Mounting:	6-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

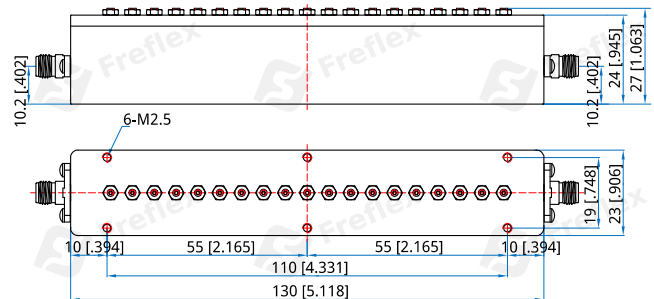

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-2200-2400-60

Customization is available upon request.