

FBF-2240-2280-30

2240~2280MHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2240~2280MHz
Insertion Loss:	1.1dB max.
Passband Ripple:	0.8dB max.
VSWR:	1.25 max.
Stopband Attenuation:	30dB@2220~2300MHz min.


Mechanical

RF Connectors:	N Female, SMA Female
Mounting:	4- Φ 2.8mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

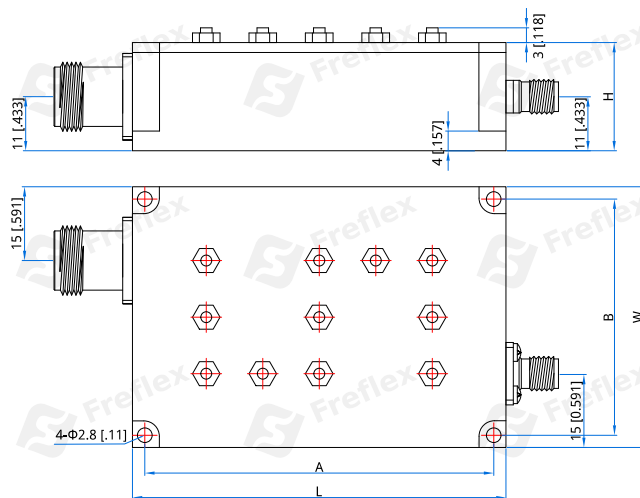

Size	L	W	H	A	B
mm	76	53	22	71	48
in	2.992	2.087	0.866	2.795	1.89

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-2240-2280-30

Customization is available upon request.