

FBF-2400-2482-30

2.4~2.482GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	2.4~2.482GHz
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	1dB max.
Stopband Attenuation:	30dB@DC~2386MHz, 2496~5000MHz min.
VSWR:	1.25 max.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	120*62*26mm 4.724*2.441*1.024in
RF Connectors:	SMA Female
Mounting:	4-M3 depth 8mm

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

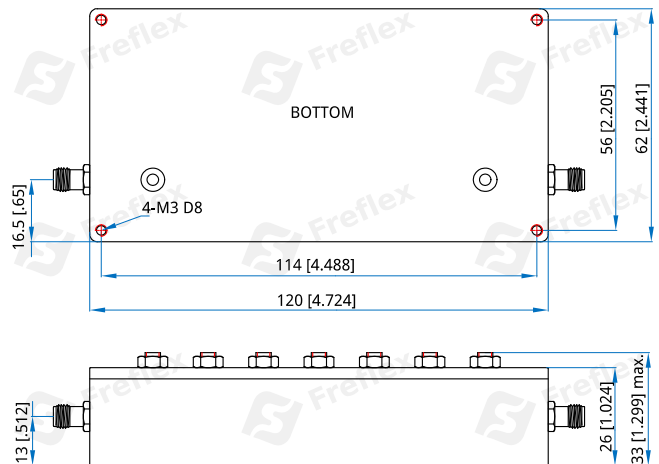

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.2 in]

How To Order

FBF-2400-2482-30

Customization is available upon request.