

FBF-24000-34000-40

24~34GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	24~34GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.8 max.
Stopband Attenuation:	40dB@DC~20GHz min. 40dB@37~55GHz min.
Average Power:	30W

Mechanical


Size ^{*1} :	35*13*7mm 1.378*0.512*0.276in
Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-18~+40°C
--------------	-----------

Outline Drawings

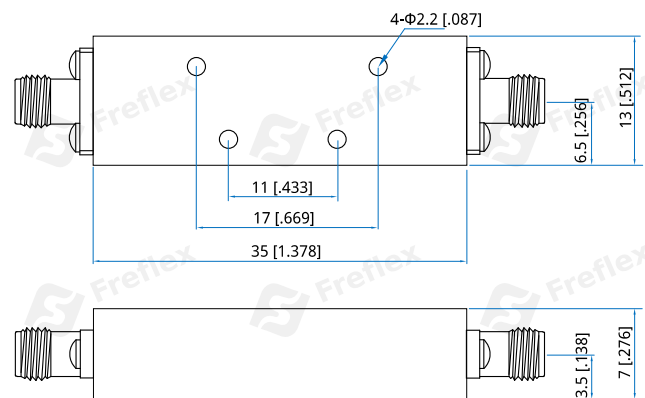

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-24000-40000-40

Customization is available upon request.