

FBF-2483.55-2499.95-40

2483.55~2499.95MHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	2483.55~2499.95MHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.4dB max.
Stopband Attenuation:	60dB
	@DC~2391.75MHz&2591.75 ~ 6500MHz min.
	40dB
	@2391.75 ~ 2441.75MHz& 2541.75~2591.75MHz min.
VSWR:	1.25 max.
Impedance:	50Ω
Average Power:	20W max.

Mechanical


Size ^{*1} :	130*28*25mm
	5.118*1.102*0.984in
RF Connectors:	SMA female
Mounting:	4-M3 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

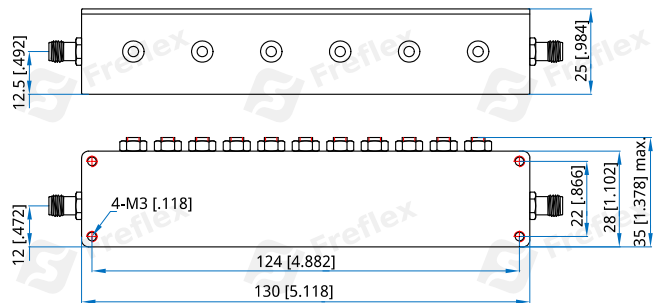

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-2483.55-2499.95-40

Customization is available upon request.