

FBF-2500-2700-30

2.5~2.7GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.5~2.7GHz
Passband Insertion Loss:	1.3dB max.
Passband Ripple:	0.6dB max.
VSWR:	1.25 max.
Stopband Attenuation:	30dB@DC~2.45GHz min. 30dB@2.75~6GHz min.
Impedance:	50Ω
Average Power:	100W max.

Mechanical


Size ^{*1} :	180*27*29mm 7.087*1.063*1.142in
Connectors:	SMA Female
Mounting:	6-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

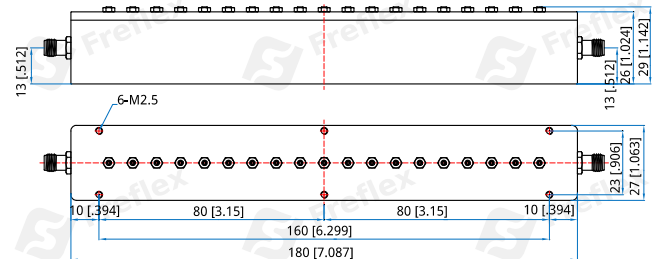

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-2500-2700-30

Customization is available upon request.