

FBF-25112.5-25312.5-60 25.1125~25.3125GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	25.1125~25.3125GHz
Insertion Loss:	3dB max.
Stopband Attenuation:	60dB@24.412.5~26.0125GHz min.
VSWR:	1.5 max.

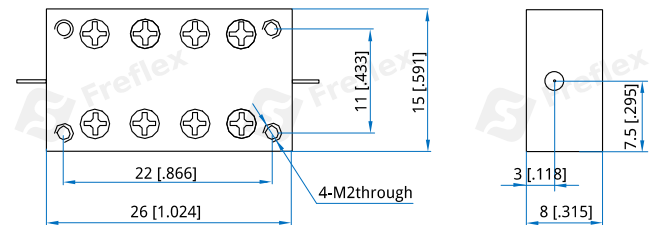
Mechanical

Size ^{*1} :	26*15*8mm 1.024*0.591*0.315in
Mounting:	4-M2mm through-hole
RF Connectors:	Φ0.3 Pin

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

FBF-25112.5-25312.5-60

Customization is available upon request.