

FBF-25500-29500-30

25.5~29.5GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	25.5~29.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.8 max.
Stopband Attenuation:	30dB@DC~25GHz min. 70dB@DC~24GHz min. 60dB@30~45GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

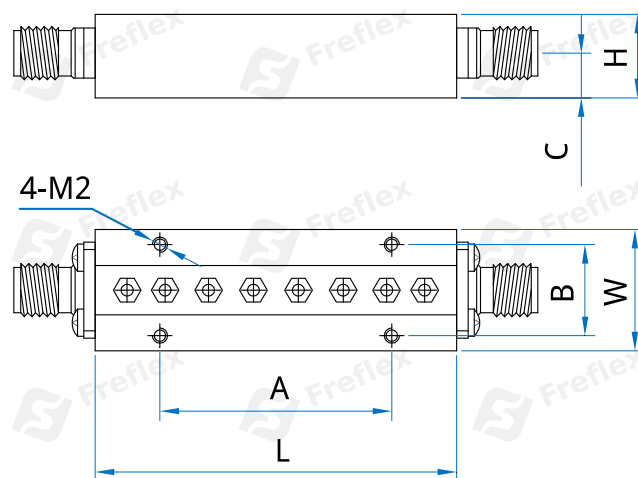

Size	L	W	H	A	B	C
mm	50.4	16	10.5	33.4	12	5.6
in	1.984	0.63	0.413	1.315	0.472	0.22

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-25500-29500-30

Customization is available upon request.