

FBF-26000-27000-60

26~27GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	26~27GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.6 max.
Stopband Attenuation:	60dB@25GHz min. 60dB@28GHz min.
Average Power:	50W


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4- Φ 2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

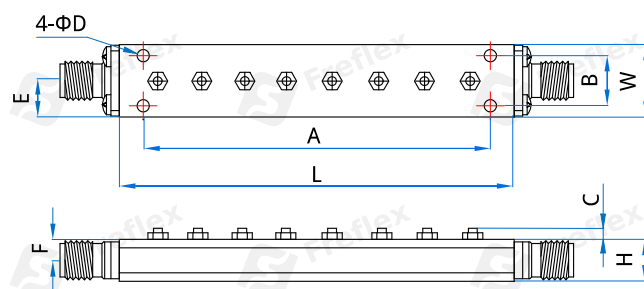

Size	L	W	H	A	B	C	D	E	F
mm	66.5	16	10	50.5	12	2	2.2	8	5.5
in	2.618	0.63	0.394	1.988	0.472	0.079	0.087	0.315	0.217

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-26000-27000-60

Customization is available upon request.