

FBF-26000-28000-30

26~28GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	26~28GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	60dB @DC~23GHz min. 30dB @25GHz min. 40dB @29~31GHz min. 60dB @31~45GHz min.

Mechanical


Size ^{*1} :	47.4*16*6mm 1.866*0.63*0.236in
RF Connectors:	2.92mm Female & Φ 0.3Pin
Mounting:	4-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+55°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

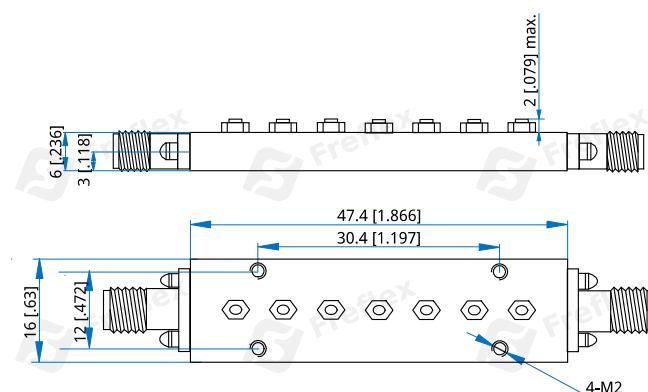

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

FBF-26000-28000-30

Customization is available upon request.