

FBF-26000-28000-40

26~28GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	26~28GHz
1dB Band Width:	2GHz min.
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband Attenuation:	60dB@DC~23GHz min.
	40dB@29~31GHz min.
	60dB@31~45GHz min.

Mechanical

Size ^{*1} :	47.4*16*6mm
	1.866*0.63*0.236in
Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

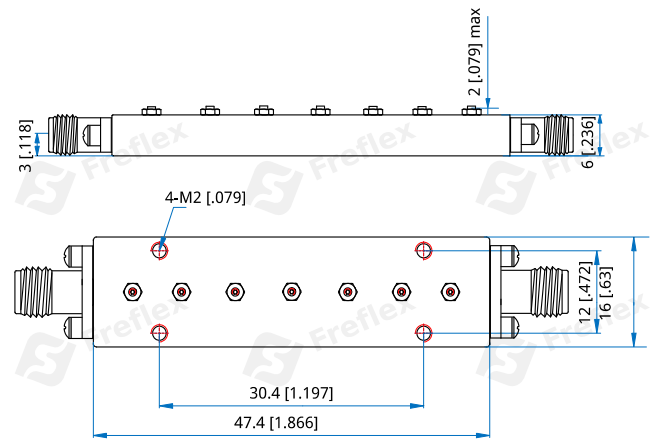
Environmental

Operating Temperature:	-40~+55°C
Non-operating Temperature:	-55~+85°C

How To Order

FBF-26000-28000-40

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]