

FBF-26000-40000-35

26~40GHz, 35dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	26~40GHz
Passband Insertion Loss:	1.1dB max.
Passband Ripple:	0.5dB max.
Stopband Attenuation:	80dB @DC ~ 24GHz min. 50dB @24 ~ 25GHz min. 35dB @ 41 ~ 42.3GHz min. 80dB @ 42.3 ~ 43GHz min. 40dB @ 43 ~ 47GHz min.
VSWR:	1.3 max.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	70*16*9mm 2.756*0.63*0.354in
RF Connectors:	2.92mm female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

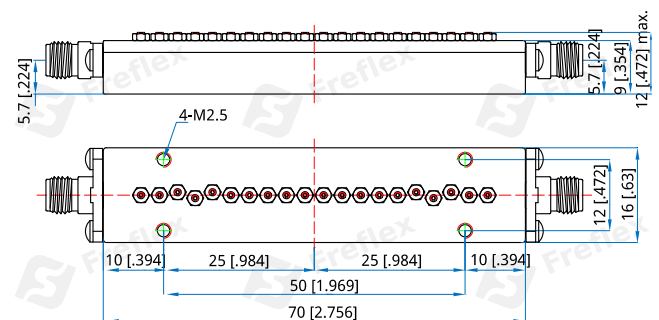

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-26000-40000-35

Customization is available upon request.