

FBF-27500-28500-60

27.5~28.5GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	27.5~28.5GHz
Passband Insertion Loss:	2dB max.
Stopband Attenuation:	60dB@26.6GHz min. 60dB@29.5GHz min.
VSWR:	1.6 max.

Mechanical


Size ^{*1} :	56.3*14*7mm 2.217*0.551*0.276in
RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

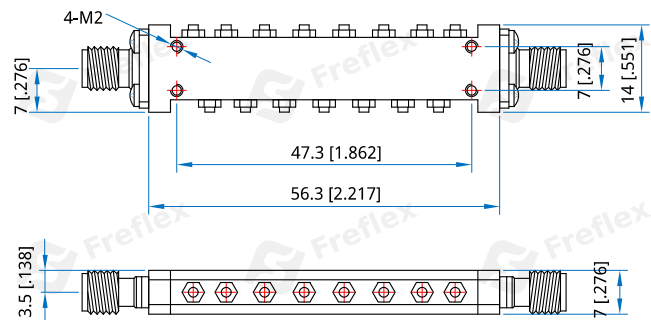

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-27500-28500-60

Customization is available upon request.