

FBF-3450-3550-90

3.45~3.55GHz, 90dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	3.45~3.55GHz
Passband Insertion Loss:	2dB max.
Passband Ripple:	0.8dB max.
Stopband Attenuation:	90dB@DC~3.35GHz min. 90dB@3.65~8GHz min.
VSWR:	1.16 max.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	120*19*22mm 4.724*0.748*0.866in
RF Connectors:	SMA female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

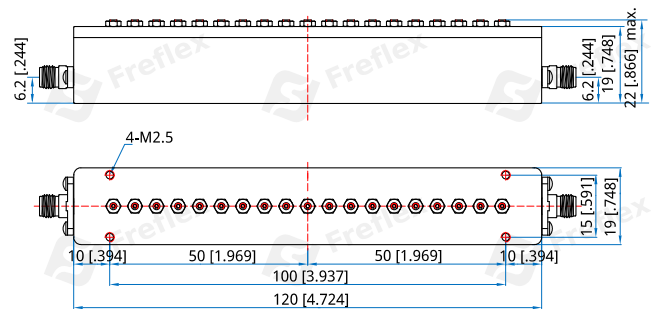

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-3450-3550-90

Customization is available upon request.