

FBF-3800-6800-60

3.8~6.8GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	3.8~6.8GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.7 max.
Stopband Attenuation:	60dB@DC~2.92GHz min. 60dB@8.16~9GHz min.
Impedance:	50Ω
Average Power:	2W max.

Mechanical


Size ^{*1} :	60*25*9mm 2.362*0.984*0.354in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

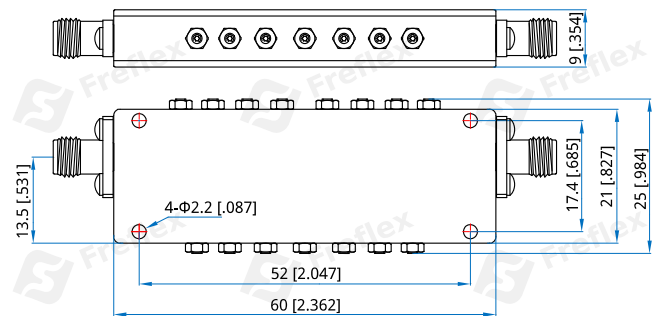

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-3800-6800-60

Customization is available upon request.