

FBF-4633-4978-50

4.633~4.978GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	4.633~4.978GHz
Passband Insertion Loss:	0.9dB max.
Passband Ripple:	0.2dB max.
VSWR:	1.16 max.
Stopband Attenuation:	80dB @DC ~ 3.756GHz, 5.705 ~ 16GHz min. 50dB @3.756 ~ 4.136GHz, 5.455 ~ 5.705GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	60*16*11mm 2.362*0.63*0.433in
Connectors:	SMA Female
Mounting:	4-M2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

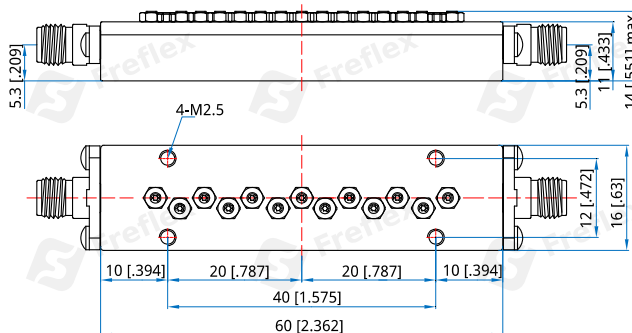

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-4633-4978-50

Customization is available upon request.