

FBF-4840-4940-40

4.84~4.94GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	4.84~4.94GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.5 max.
Stopband Attenuation:	40dB@0.1~4.75GHz min. 40dB@5.05~12GHz min.
Power:	40W

Mechanical


Size ^{*1} :	52*19*10mm 2.047*0.748*0.394in
Connectors:	SMA Female (Removable)
Mounting:	4-M2 through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

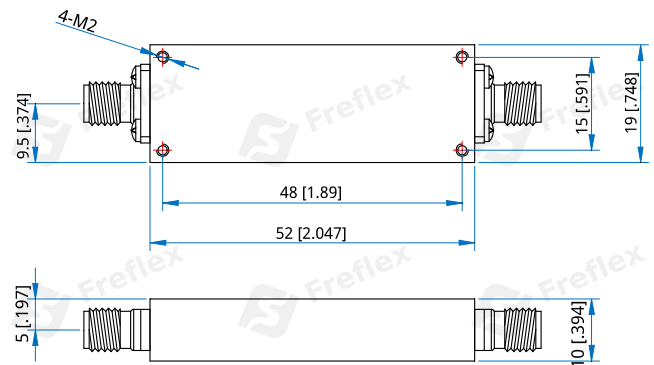

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

FBF-4840-4940-40

Customization is available upon request.