

FBF-5000-6000-35

5~6GHz, 35dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	5~6GHz
Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	35dB @DC~4.6GHz min. 35dB @6.4~10GHz min.

Mechanical


Size ^{*1} :	50*14*9mm 1.969*0.551*0.354in
Connectors:	SMA Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

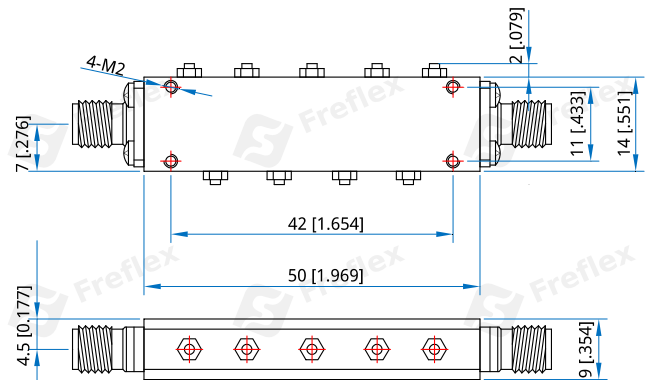

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBF-5000-6000-35

Customization is available upon request.