

FBF-5600-6000-60

5.6~6GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	5.6~6GHz
Center Insertion Loss:	0.9dB max.
VSWR:	1.5 max.
Stopband Attenuation:	80dB@5.05GHz min. 60dB@6.15GHz min.
Impedance:	50Ω

Mechanical


Size ^{*1} :	106*18*11mm 4.173*0.709*0.433in
Connectors:	SMA Female
Mounting:	4-M2 through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

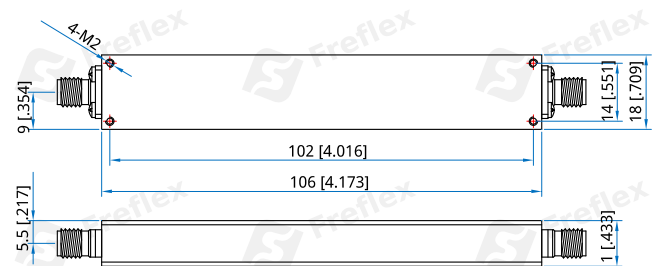

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-5600-6000-60

Customization is available upon request.