

FBF-5900-7250-70

5.9~7.25GHz, 70dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	5.9~7.25GHz
Passband Insertion Loss:	0.7dB max.
Passband Ripple:	0.28dB max.
VSWR:	1.16 max.
Stopband Attenuation:	80dB @DC ~ 5.05GHz, 7.87 ~ 19GHz min. 70dB @5.05 ~ 5.08GHz, 7.84 ~ 7.87GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	80*16*11mm 3.15*0.63*0.433in
Connectors:	SMA Female
Mounting:	4-M2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

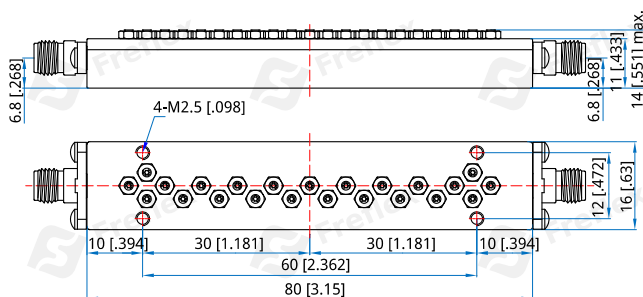

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-5900-7250-70

Customization is available upon request.