

FBF-6000-18000-50

6~18GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	6~18GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.6 max.
Stopband Attenuation:	60dB @DC ~ 5.4GHz, 19.2 ~ 24.5GHz min. 50dB @24.5 ~ 27.5GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	62*26*10mm 2.441*1.024*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

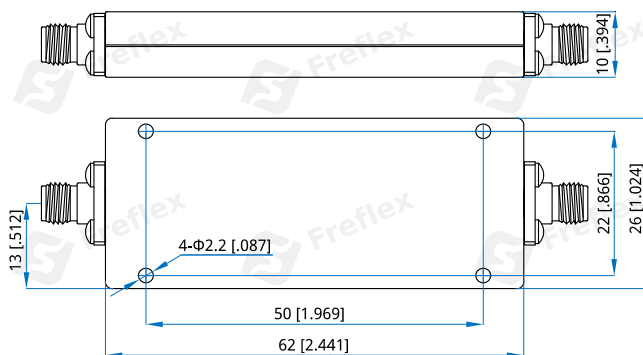

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-6000-18000-50

Customization is available upon request.