

FBF-6530-6864-60

6530~6864MHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	6530~6864MHz
Insertion Loss:	2dB max.
Stopband Attenuation:	60dB@6100MHz min. 60dB@7500MHz min.
VSWR:	1.5 max.

Mechanical


Size ^{*1} :	45.5*17*8.4mm 1.791*0.669*0.331in
Connectors:	SMA Female
Mounting:	4-M2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

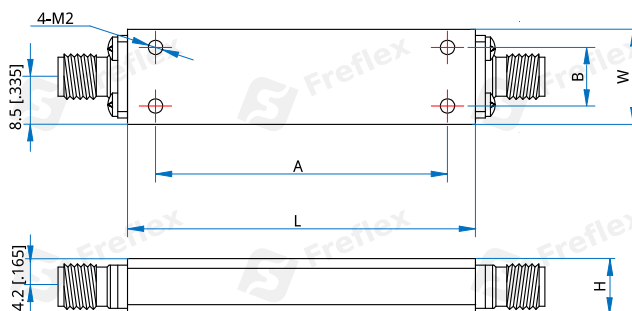

Size	L	W	H	A	B
mm	45.5	17	8.4	42.1	13.6
in	1.791	0.669	0.331	1.657	0.535

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-6530-6864-60

Customization is available upon request.