

FBF-9990-10010-40

9.99~10.01GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	9.99~10.01GHz
Passband Insertion Loss:	2dB max. @10GHz
VSWR:	1.3 max. @10GHz
Stopband Attenuation:	40dB@DC~9.93GHz min. 40dB@10.07~13GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	90*25*17mm 3.543*0.984*0.669in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-15~+30°C
--------------	-----------

Outline Drawings

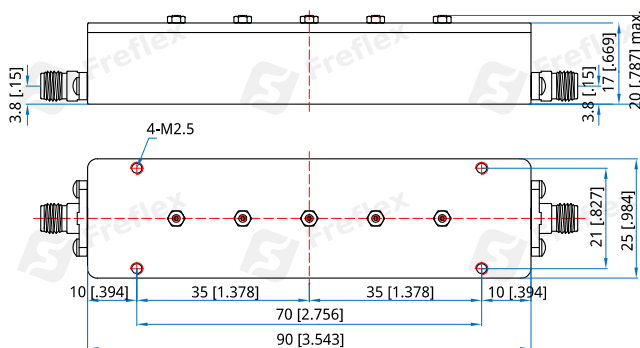

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FBF-9990-10010-40

Customization is available upon request.