

FRF-1166-1186-60

1.166~1.186GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.146GHz 1.206~3.6GHz
Passband Insertion Loss:	1dB max. @DC~1136MHz, 1216~3600MHz 2dB max. @1136~1146MHz, 1206~1216MHz
Passband VSWR:	1.5 max.
Stopband:	1.166~1.186GHz
Stopband Attenuation:	60dB min.
Average Power:	50W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	234*63*28mm 9.213*2.48*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

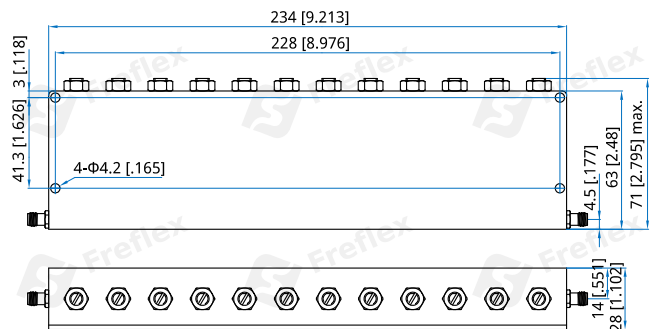

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-1166-1186-60

Customization is available upon request.