

FRF-1275-1281-40

1.275~1.281GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.256GHz 1.3~3.9GHz
Passband Insertion Loss:	1dB max. @DC~1246MHz, 1310~3900MHz 2dB max. @1246~1256MHz, 1300~1310MHz
Passband VSWR:	1.5 max.
Stopband:	1.275~1.281GHz
Stopband Attenuation:	40dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	145*58*28mm 5.709*2.283*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

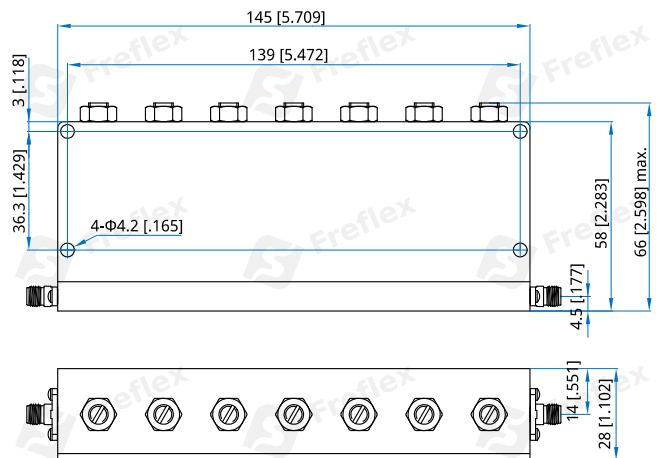

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-1275-1281-40

Customization is available upon request.