

FRF-2500-2570-60

2.5~2.57GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.475GHz 2.595~6.5GHz
Passband Insertion Loss:	2dB max. (at the corner: 3dB max.)
Passband VSWR:	1.5 max.
Stopband:	2.5~2.57GHz
Stopband Attenuation:	60dB min.
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	209*37*22mm 8.228*1.457*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings

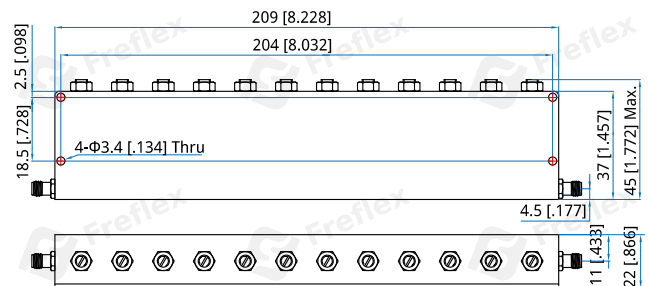

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FRF-2500-2570-60

Customization is available upon request.