

FBT-0.5-2000

0.5~2000MHz

Features:
 * Broadband
 * Small Size

Applications:
 * Telecom
 * Satcom
 * Laboratory Test
 * Instrumentation

Electrical


Frequency Range:	0.5~2000MHz
Insertion Loss:	2dB max.
VSWR:	1.45 max.
Voltage:	50V max.
Current:	6.5A max.
Inductance:	47uH typ.
DC Impedance:	250mΩ typ.

Mechanical

Size ^{*1} :	40*50*30mm 1.575*1.969*1.181in
Connectors:	N Female
Mounting:	4-M2.5 depth 4mm

[1] Exclude connectors.

Outline Drawings

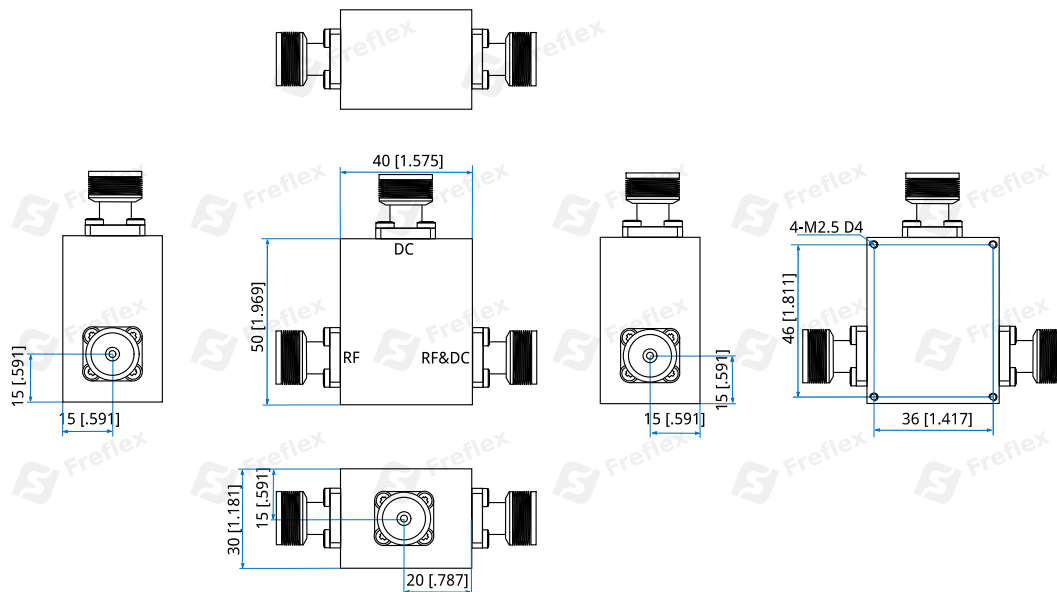

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBT-0.5-2000

Customization is available upon request.