

FBT-1000-44000

1~44GHz

Features:

- * Broadband
- * Small Size

Applications:

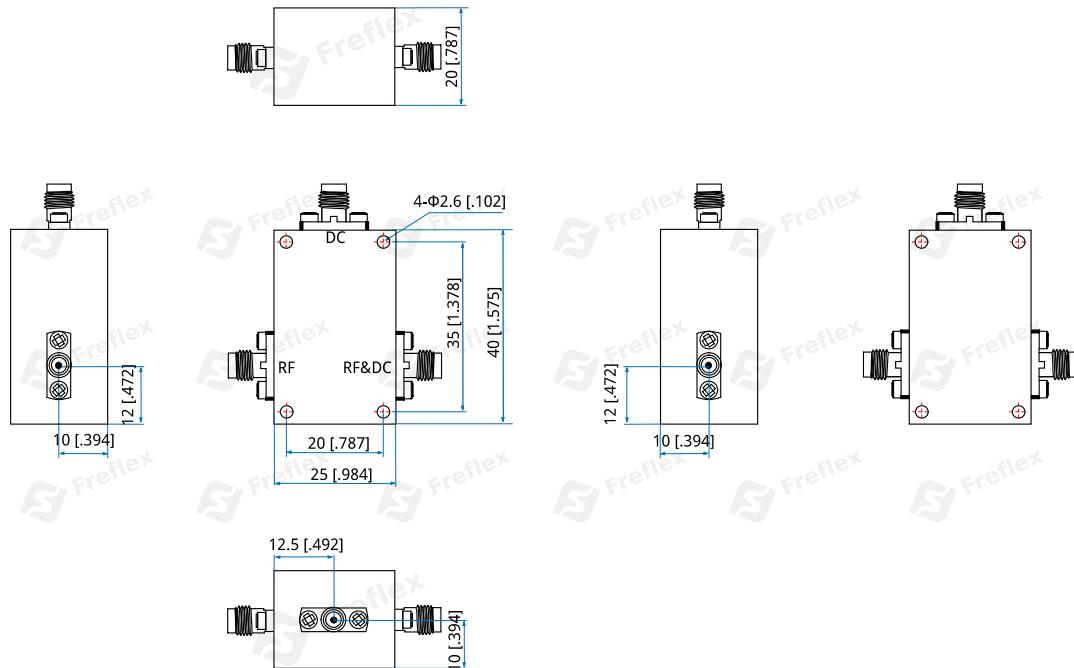
- * Telecom
- * Satcom
- * Laboratory Test
- * Instrumentation

Electrical

| | |
|----------------|------------|
| Frequency: | 1~44GHz |
| Insertion Loss | 5dB max. |
| VSWR: | 1.8 typ. |
| Voltage: | 16V max. |
| Current: | 2A max. |
| Inductance: | 10uH typ.s |
| Isolation: | 40dB typ. |
| DC Impedance: | 1.2Ω typ. |
| Power: | 20W max. |

Mechanical

| | |
|----------------------|-----------------------|
| Size ^{*1} : | 40*25*20 |
| | 1.575*0.984*0.787in |
| RF Connectors: | 2.92mm Female |
| DC Connectors: | SMA Female |
| Mounting: | 4-Φ2.6mm through-hole |

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order
FBT-1000-44000

Customization is available upon request.