

FBT-200-12000-S

0.2~12GHz

Features:

- * Broadband
- * Small Size

Applications:

- * Telecom
- * Satcom
- * Laboratory Test
- * Instrumentation

Electrical

Frequency:	0.2~12GHz
Insertion Loss:	0.6dB max.
VSWR:	1.8 max.
Voltage:	0~36V DC
Current:	0.14A @36V
RF Input Power:	10W max.

Mechanical


Size ^{*1} :	30*20*12mm 1.181*0.787*0.472in
RF Connectors:	SMA
Power Supply & Control Interface:	Solder Pin & Terminal Post
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

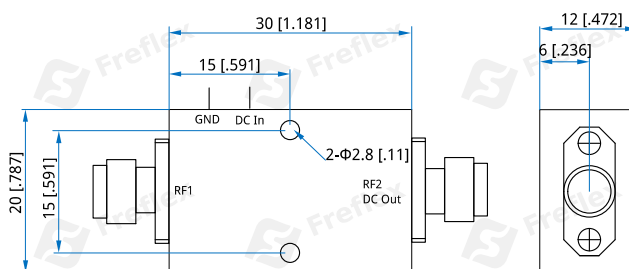

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBT-200-12000-S

Customization is available upon request.