

FBT-30K-40000

30KHz~40GHz

Features:

- * Broadband
- * Small Size

Applications:

- * Telecom
- * Satcom
- * Laboratory Test
- * Instrumentation

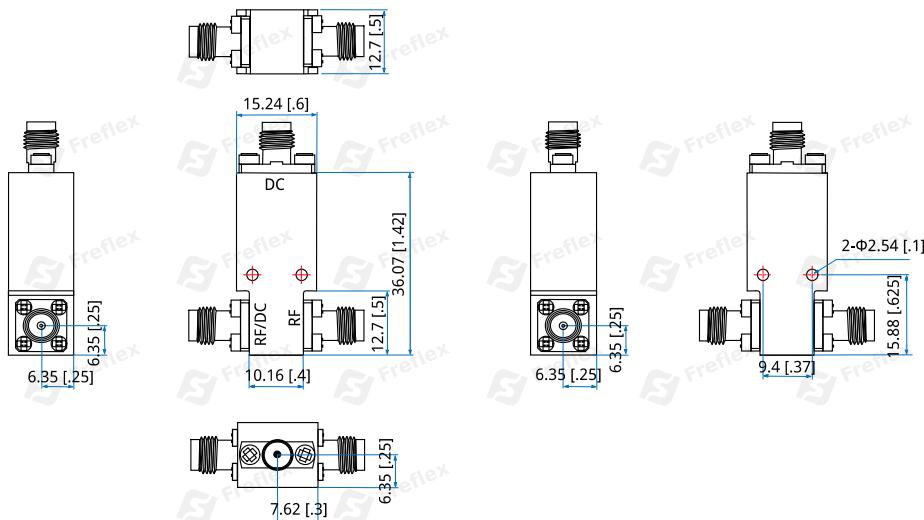
Electrical

Frequency:	30KHz~40GHz
Insertion Loss	4dB max.
VSWR:	2 max.
DC Isolation:	30dB typ.
Voltage:	50V typ.
Current:	750mA max.
Inductance:	220uH typ.
DC Impedance:	1.2Ω typ.

Mechanical

Size ^{*1} :	36.07*15.24*12.7
	1.42*0.6*0.5in
RF Connectors:	2.92mm female
DC Connectors:	SMA female
Mounting:	2-Φ2.54mm through-hole

[1] Exclude connectors.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order
FBT-30K-40000

Customization is available upon request.