

FC2-FG-T50P-4

2.4mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~50GHz
VSWR: 1.3 max.
Imepdance: 50Ω

Mechanical


RF Connector: 2.4mm Female
Mating Cable: FT50P
Outer Conductor: 303F stainless steel

How To Order

FC2-FG-T50P-4

Customization is available upon request.

Outline Drawings

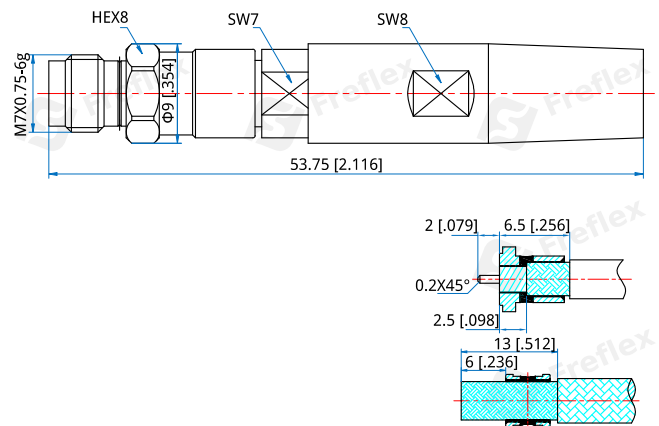

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]