

## FC2-MG-086-1

### 2.4mm Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency: DC~50GHz  
VSWR: 1.35 max.

#### Mechanical


RF Connector: 2.4mm male  
Mating Cable: FH280, FE086, FD086, RG316  
Outer Conductor: Stainless steel  
Inter Conductor: Gold plated brass

#### How To Order

**FC2-MG-086-1**

Customization is available upon request.

#### Outline Drawings

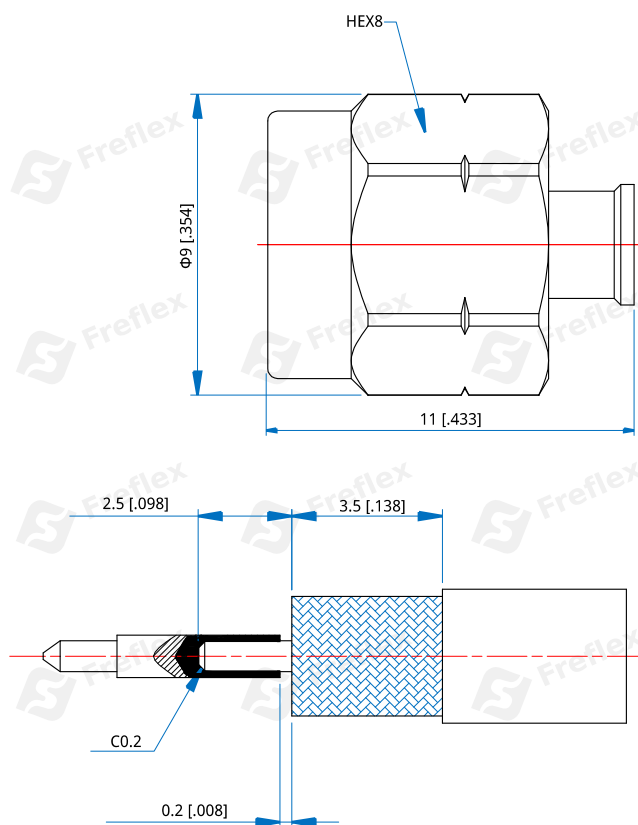

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]